

PRELIMINARY
SPECIFICATIONS

MOVE THE WORLD FORWARD ▶ MITSUBISHI
HEAVY
INDUSTRIES
GROUP

PREMI^A EM

PLATFORM POWER PALLET AND DOUBLE PALLET TRUCKS

2.0 - 2.5 tonnes

ENGINEERED FOR ACTION...
AND READY FOR EVERY CHALLENGE

Business love its efficiency gains. Drivers love the smooth,
easy operations. But what will you make of PREMI^A EM?

SPECIFICATIONS

PBV20N2
PBF25N2
PBV20PD

WHEN
**RELIABILITY IS
EVERYTHING...**



 **MITSUBISHI
FORKLIFT TRUCKS**

PREMIA EM

PBV20N2, PBV20PD & PBF25N2 Series

PLATFORM POWER PALLET AND DOUBLE PALLET TRUCKS

2.0 – 2.5 tonnes



Sealed, protected, and specifically designed for low maintenance needs in every system, PREMIA EM platform power pallet trucks PBV20N2 and PBF25N2 are built to cope with the most demanding of conditions. In spite of uneven ground, splashing water, dust and rough treatment, they just keep on working. With intuitive handling via the simple-to-use tiller arm, from the safety and comfort of the ergonomic platform, your operator is always secure, confident and in full control. The double pallet handler PBV20PD impressively combines the efficiency of a pedestrian double stacker with long-distance travel capabilities - meaning you go further and do much more - for less.

Both standard (PBV20N2) and heavy duty (PBF25N2) platform power pallet models are available to meet different needs. The PBF25N2 is designed to withstand non-stop, intensive use, over longer distances, with the heaviest loads. It will reach a top speed of 8.5 km/h (optional 12km/h). The standard PBV20N2 is ideal for pallet transfer work in logistics terminals and industrial warehouses, as well as loading and unloading vehicles. The PBV20PD double pallet handler's powerful performance, coupled with an anti-rollback system, means it's perfect for double-stacking on ramps.



FRAME AND BODY

- **Closed chassis** offers protection against dirt, dust and other particles to reduce wear (PBV20N2 & PBF25N2).
- **High stability** is ensured by use of two castor wheels – next to the central drive wheel – in addition to the two load wheels.
- **RapidAccess features** allow quick and easy entry to all areas for checks and maintenance.
- **Five-point chassis** is fitted with a hydraulic friction force system (on PBV20PD) and a floating drive unit (on PBV20N2 and PBF25N2) to reduce vibrations and the risk of operator fatigue.

DRIVE

- **Powerful, sealed motor** and Vulkollan drive wheel ensure long component life.
- **Oil-filled, sealed transmission** is shock-resistant, quiet and requires little maintenance.
- **Dust-shielded load wheels** require less maintenance and replacement of components.
- **Performance setting** including pre-set modes - allows instant programming without special tools.

FORKS

- **High-strength forks** offer durable, welded construction with rounded tips for easy pallet entry.

- **Market-leading lift height** of 220 mm allows easy handling on steep ramps and loading docks, even with damaged pallets (PBV20N2 & PBF25N2).
- **Tapered forks** enhance safety, while offering quicker and easier access to pallets in racks or block stacks.

BRAKES

- **Regenerative braking** gives effective control, without brake wear, and extends shift life.
- **Parking brake** is automatically activated, when necessary, for extra safety on ramps.

ELECTRICAL AND CONTROL SYSTEMS

- **New generation, multi-function controller** governs both drive and lift for smooth, quiet control with fewer components to maintain.
- **Full programmability** allows adjustment of acceleration, travel speed and braking to suit the application and operator – for greater versatility.
- **On-board diagnostics** and fault memory folder speed up servicing and help prevent damage.
- **Waterproof wiring and connectors** combine with closed battery compartment and channelling of splashed water to prevent system failure and corrosion (PBV20N2 & PBF25N2).



There is more information on PREMIA EM on mitforklift.com

For more extensive information please visit our website mitforklift.com



mft2.eu/premiaem

PREMIA EM

PBV20N2, PBV20PD & PBF25N2 Series

PLATFORM POWER PALLET AND DOUBLE PALLET TRUCKS

2.0 – 2.5 tonnes



- **Versatile battery compartment** accommodates DIN and BS size batteries with a variety of capacities for maximum compatibility with user's equipment needs (PBV20N2 & PBF25N2).
- **High capacity batteries** deliver 375Ah as standard and up to 500Ah on PBF25N2 to extend shifts.
- **Li-ion battery (optional on PBV20PD only)** allows for fast charging - removing the need for extra batteries.
- **PIN-code access** prevents unauthorised use of the truck (optional on PBV20N2 & PBF25N2).
- **Electronic power steering** means smooth, precise control with minimal effort and maximum comfort (optional on PBV20N2 & PBV20PD).
- **Easy, foldable side bars** eliminates the need for operators to step off the platform for highly efficient, safe operations (optional on PBV20PD).
- **Choice of performance modes** via key switch enhances safety, energy efficiency and productivity (PBV20N2 & PBF25N2).
- **Ergonomic levers** allow operators to raise and lower loads with ease - even when wearing gloves (optional only on PBV20N2 & PBF25N2).
- **Creep speed function** and tiller arm lock bypass maximise safety and control in confined spaces (optional on PBV20PD).
- **Maxius steering wheel** offers the ultimate in ergonomics, comfort and design, with all operating controls easily in reach (PBF25N2).
- **Side-stance operating position** requires minimal upper body and neck movement, reducing operator strain (PBF25N2).
- **Battery discharge indicator** prevents deep discharge and allows for use to be monitored.
- **Multifunctional display** alerts operators and service engineers to potential problems - helping to avoid damage and encourage maintenance.

OPERATOR ENVIRONMENT AND CONTROLS

- **Easy-to-operate tiller arm** features large, easy-use buttons so operators can focus on the task in hand and minimise mistakes to enhance safety (PBV20N2 & PBV20PD).
- **Left-handed or right-handed controls** are possible, thanks to the versatile design of controls.
- **Ultra-low step height** offers easy on/off access to keep operators alert and productive throughout shifts.
- **Dampened platform** stays down for easier access and encourages a natural operating stance for additional protection of operators against knocks or bumps.



There is more information on PREMIA EM on mitforklift.com

For more extensive information please visit our website mitforklift.com




VDI - PERFORMANCE & DIMENSIONS

CHARACTERISTICS			
1.1	Manufacturer		Mitsubishi Forklift Trucks
1.2	Manufacturer's model designation		PBV20N2
1.3	Power source		Battery
1.4	Operator type		Pedestrian / stand-on
1.5	Load capacity	Q	kg 2000
1.6	Load center distance	c	mm 600
1.8	Load wheel axle to fork face (forks lowered)	x	mm 960
1.9	Wheelbase	y	mm 1421
WEIGHT			
2.1	Truck weight without load, with maximum battery weight		kg 660
2.2	Axle loadings with nominal load & maximum battery weight, drive / load side		kg 950 / 1710
2.3	Axle loadings without load & with maximum battery weight, drive / load side		kg 535 / 125
WHEELS, DRIVE TRAIN			
3.1	Tyres: PT = Power Thane, Vul = Vulkollan, P = Polyurethane, N = Nylon, R = Rubber drive / load side		Vul / Vul
3.2	Tyre dimensions, drive side		mm 230 x 70
3.3	Tyre dimensions, load side		mm 85 x 75
3.4	Castor wheel dimensions (diameter x width)		mm 125 x 55
3.5	Number of wheels, load / drive side (x = driven)		4 / 1 x + 2
3.6	Track width (center of tyres), drive side	b10	mm 480
3.7	Track width (center of tyres), load side	b11	mm 375
DIMENSIONS			
4.2a	Height with mast lowered	h1	mm
4.4	Lift height	h3	mm 135
4.5	Height with mast extended	h4	mm
4.6	Initial lift	h5	mm
4.7	Height to top of overhead guard	h6	mm
4.8	Seat- or stand height	h7	mm 177
4.9	Height of tiller arm / steering console (min./max.)	h14	mm 1180 / 1350
4.10	Height of support legs	h8	mm
4.15	Fork height, fully lowered	h13	mm 85
4.19	Overall length	l1	mm 1852 ¹⁾ / 2346 ¹⁾
4.20	Length to fork face	l2	mm 702 ¹⁾ / 1195 ¹⁾
4.21	Overall width	b1/b2	mm 720
4.22	Fork dimensions (thickness, width, length)	s/e/l	mm 55 / 165 / 1150
4.24	Fork carriage width	b3	mm
4.25	Outside width over forks (minimum / maximum)	b5	mm 540
4.32	Ground clearance at center of wheelbase, (forks lowered)	m2	mm 30
4.33c	Working aisle width (Ast) with 1000 x 1200 mm pallets, load crosswise, platform up/down	Ast	mm
4.33d	Working aisle width (Ast3) with 1000 x 1200 mm pallets, load crosswise, platform up/down	Ast3	mm 1920 ¹⁾ / 2400 ¹⁾
4.34c	Working aisle width (Ast) with 800 x 1200 mm pallets, load lengthwise, platform up/down	Ast	mm
4.34d	Working aisle width (Ast3) with 800 x 1200 mm pallets, load lengthwise, platform up/down	Ast3	mm 2120 ¹⁾ / 2600 ¹⁾
4.35	Turning radius	Wa	mm 1680 ¹⁾ / 2160 ¹⁾
PERFORMANCE			
5.1	Travel speed, with / without load	km/h	9.0 / 9.0 (12.0) ²⁾
5.2	Lifting speed, with / without load	m/s	0.03 / 0.05
5.3	Lowering speed, with / without load	m/s	0.07 / 0.08
5.7	Gradeability, with / without load	%	9 / 25
5.8	Maximum gradeability with / without load	%	
5.9	Acceleration time (10 metres) with / without load	s	
5.10	Service brakes (mechanical / hydraulic / electric / pneumatic)		Electric
ELECTRIC MOTORS			
6.1	Drive motor capacity (60 min. short duty)	kW	2.3
6.2	Lift motor output at 15% duty factor	kW	1.2 (10%)
6.4	Battery voltage/capacity at 5-hour discharge	V/Ah	24 / 250 - 375 ¹⁾
6.5	Battery weight	kg	212 - 291
MISCELLANEOUS			
8.1	Type of drive control		Stepless
10.7	Level of noise at the ear level of the driver according to EN 12 053:2001 and EN ISO 4871 in work LpAZ	dB(A)	
10.7.1	Level of noise at the ear level of the driver according to EN 12 053:2001 and EN ISO 4871, drive/lift/idle LpAZ	dB(A)	66

PREMI^{EM} PLATFORM POWER PALLET TRUCK PBV20N2

2.0 tonnes

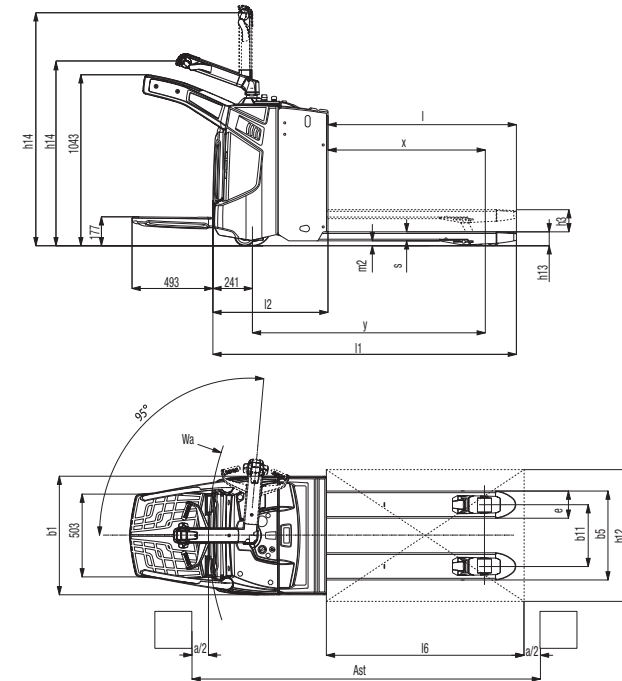

Ast = Wa-x+l6+a
Ast = Working aisle width
Wa = Turning radius

1) With 375Ah battery the l2 dimension increases 72mm
2) With 500Ah battery the l2 dimension increases 72mm



VDI - PERFORMANCE & DIMENSIONS

CHARACTERISTICS				
1.1	Manufacturer			Mitsubishi Forklift Trucks
1.2	Manufacturer's model designation			PBV20PD
1.3	Power source			Battery
1.4	Operator type			Pedestrian / stand-on
1.5	Load capacity	Q	kg	2000 / 1000 + 1000
1.6	Load center distance	c	mm	600
1.8	Load wheel axle to fork face (forks lowered)	x	mm	982 / 832
1.9	Wheelbase	y	mm	1754 / 1604
WEIGHT				
2.1	Truck weight without load, with maximum battery weight		kg	1270
2.2	Axle loadings with nominal load & maximum battery weight, drive / load side		kg	1230 / 2040
2.3	Axle loadings without load & with maximum battery weight, drive / load side		kg	940 / 330
WHEELS, DRIVE TRAIN				
3.1	Tyres: PT = Power Thane, Vul = Vulkollan, P = Polyurethane, N = Nylon, R = Rubber drive / load side			Vul / Vul
3.2	Tyre dimensions, drive side		mm	230 x 90
3.3	Tyre dimensions, load side		mm	85 x 70
3.4	Castor wheel dimensions (diameter x width)		mm	150 x 60
3.5	Number of wheels, load / drive side (x = driven)			1x+2/4(2)
3.6	Track width (center of tyres), drive side	b10	mm	526
3.7	Track width (center of tyres), load side	b11	mm	390
DIMENSIONS				
4.2a	Height with mast lowered	h1	mm	1410 / 1560
4.4	Lift height	h3	mm	1585 / 2000
4.5	Height with mast extended	h4	mm	2095 / 2395
4.6	Initial lift	h5	mm	120
4.7	Height to top of overhead guard	h6	mm	2287
4.8	Seat- or stand height	h7	mm	165
4.9	Height of tiller arm / steering console (min./max.)	h14	mm	1135 / 1475
4.10	Height of support legs	h8	mm	87
4.15	Fork height, fully lowered	h13	mm	90
4.19	Overall length	l1	mm	2185 / 2571
4.20	Length to fork face	l2	mm	1035
4.21	Overall width	b1/b2	mm	770
4.22	Fork dimensions (thickness, width, length)	s/e/l	mm	65/180/1150,1000
4.24	Fork carriage width	b3	mm	590
4.25	Outside width over forks (minimum / maximum)	b5	mm	570
4.32	Ground clearance at center of wheelbase, (forks lowered)	m2	mm	17
4.33c	Working aisle width (Ast) with 1000 x 1200 mm pallets, load crosswise, platform up/down	Ast	mm	2685 / 3072
4.33d	Working aisle width (Ast3) with 1000 x 1200 mm pallets, load crosswise, platform up/down	Ast3	mm	
4.34c	Working aisle width (Ast) with 800 x 1200 mm pallets, load lengthwise, platform up/down	Ast	mm	2668 / 3055
4.34d	Working aisle width (Ast3) with 800 x 1200 mm pallets, load lengthwise, platform up/down	Ast3	mm	2430 / 2817
4.35	Turning radius	Wa	mm	1030 + x / 1417 + x
PERFORMANCE				
5.1	Travel speed, with / without load		km/h	10 / 10 (12.5)
5.2	Lifting speed, with / without load		m/s	0.20 / 0.32
5.3	Lowering speed, with / without load		m/s	0.39 / 0.24
5.7	Gradeability, with / without load		%	6.5 / 17.2
5.8	Maximum gradeability with / without load		%	14.5 / 27.7
5.9	Acceleration time (10 metres) with / without load		s	6.1 / 4.9
5.10	Service brakes (mechanical / hydraulic / electric / pneumatic)			Electric
ELECTRIC MOTORS				
6.1	Drive motor capacity (60 min. short duty)		kW	2.2
6.2	Lift motor output at 15% duty factor		kW	3.2
6.4	Battery voltage/capacity at 5-hour discharge		V/Ah	24 / 220 - 400
6.5	Battery weight		kg	250 - 370
MISCELLANEOUS				
8.1	Type of drive control			Stepless
10.7	Level of noise at the ear level of the driver according to EN 12 053:2001 and EN ISO 4871 in work LpAZ		dB(A)	60.1
10.7.1	Level of noise at the ear level of the driver according to EN 12 053:2001 and EN ISO 4871, drive/lift/idle LpAZ		dB(A)	

PREMI^A EM

DOUBLE PALLET TRUCK PBV20PD

2.0 tonnes

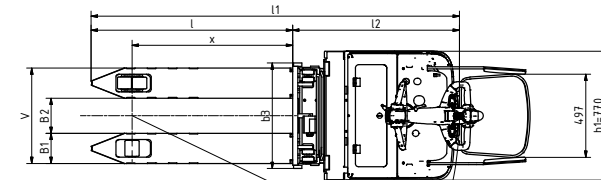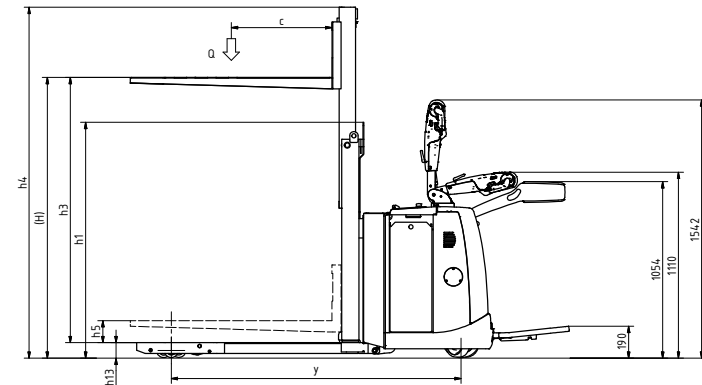

Ast = $Wa - x + l6 + a$
Ast = Working aisle width
Wa = Turning radius

MAST TYPE	h3 + h13 mm	h1* mm	h2 + h13 mm
PBP16PD			
DUPLIX	1675	1400	NA
	2090	1550	NA

h3+h13 = Lifting height
h1 = Lowered mast height
h2+h13 = Free lift


* h1 closed mast height includes polycarbonate finger protection. Mast height excl. Finger protection is 1343mm / 1493mm.

VDI - PERFORMANCE & DIMENSIONS

CHARACTERISTICS			
1.1	Manufacturer		Mitsubishi Forklift Trucks
1.2	Manufacturer's model designation		PBF25N2
1.3	Power source		Battery
1.4	Operator type		Stand-on
1.5	Load capacity	Q	kg 2500
1.6	Load center distance	c	mm 600
1.8	Load wheel axle to fork face (forks lowered)	x	mm 960
1.9	Wheelbase	y	mm 1501
WEIGHT			
2.1	Truck weight without load, with maximum battery weight		kg 787
2.2	Axle loadings with nominal load & maximum battery weight, drive / load side		kg 1155 / 2144
2.3	Axle loadings without load & with maximum battery weight, drive / load side		kg 640 / 147
WHEELS, DRIVE TRAIN			
3.1	Tyres: PT = Power Thane, Vul = Vulkollan, P = Polyurethane, N = Nylon, R = Rubber drive / load side		Vul / Vul
3.2	Tyre dimensions, drive side	mm	230 x 70
3.3	Tyre dimensions, load side	mm	85 x 75
3.4	Castor wheel dimensions (diameter x width)	mm	125 x 55
3.5	Number of wheels, load / drive side (x = driven)		4 / 1 x + 2
3.6	Track width (center of tyres), drive side	b10	mm 480
3.7	Track width (center of tyres), load side	b11	mm 375
DIMENSIONS			
4.2a	Height with mast lowered	h1	mm
4.4	Lift height	h3	mm 135
4.5	Height with mast extended	h4	mm
4.6	Initial lift	h5	mm
4.7	Height to top of overhead guard	h6	mm
4.8	Seat- or stand height	h7	mm 170
4.9	Height of tiller arm / steering console (min./max.)	h14	mm 1143 / 1290
4.10	Height of support legs	h8	mm
4.15	Fork height, fully lowered	h13	mm 85
4.19	Overall length	l1	mm 2277 ²⁾
4.20	Length to fork face	l2	mm 1127 ²⁾
4.21	Overall width	b1/b2	mm 720
4.22	Fork dimensions (thickness, width, length)	s/e/l	mm 55 / 165 / 1150
4.24	Fork carriage width	b3	mm
4.25	Outside width over forks (minimum / maximum)	b5	mm 540
4.32	Ground clearance at center of wheelbase, (forks lowered)	m2	mm 29
4.33c	Working aisle width (Ast) with 1000 x 1200 mm pallets, load crosswise, platform up/down	Ast	mm
4.33d	Working aisle width (Ast3) with 1000 x 1200 mm pallets, load crosswise, platform up/down	Ast3	mm 2395 ²⁾
4.34c	Working aisle width (Ast) with 800 x 1200 mm pallets, load lengthwise, platform up/down	Ast	mm
4.34d	Working aisle width (Ast3) with 800 x 1200 mm pallets, load lengthwise, platform up/down	Ast3	mm 2595 ²⁾
4.35	Turning radius	Wa	mm 2155 ²⁾
PERFORMANCE			
5.1	Travel speed, with / without load	km/h	9.0 / 12.0
5.2	Lifting speed, with / without load	m/s	0.03 / 0.05
5.3	Lowering speed, with / without load	m/s	0.07 / 0.08
5.7	Gradeability, with / without load	%	9 / 20
5.8	Maximum gradeability with / without load	%	
5.9	Acceleration time (10 metres) with / without load	s	
5.10	Service brakes (mechanical / hydraulic / electric / pneumatic)		Electric
ELECTRIC MOTORS			
6.1	Drive motor capacity (60 min. short duty)	kW	2.3
6.2	Lift motor output at 15% duty factor	kW	1.2
6.4	Battery voltage/capacity at 5-hour discharge	V/Ah	24 / 375 - 500 ²⁾
6.5	Battery weight	kg	291 - 380
MISCELLANEOUS			
8.1	Type of drive control		Stepless
10.7	Level of noise at the ear level of the driver according to EN 12 053:2001 and EN ISO 4871 in work LpAZ	dB(A)	
10.7.1	Level of noise at the ear level of the driver according to EN 12 053:2001 and EN ISO 4871, drive/lift/idle LpAZ	dB(A)	65

PREMI^{EM} PLATFORM POWER PALLET TRUCK PBF25N2

2.5 tonnes

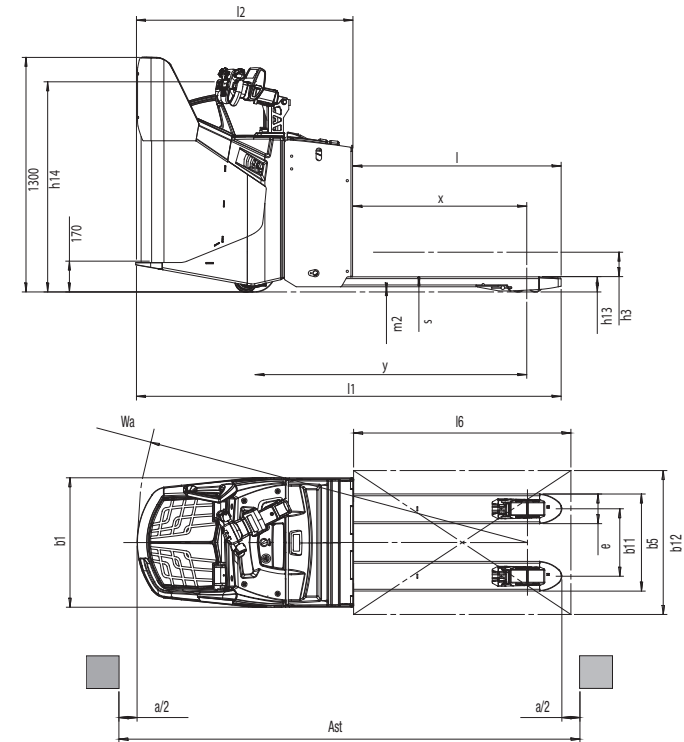

Ast = $Wa - x + l6 + a$
Ast = Working aisle width
Wa = Turning radius

1) With 375Ah battery the l2 dimension increases 72mm
2) With 500Ah battery the l2 dimension increases 72mm

STANDARD EQUIPMENT & OPTIONS

- = Standard
- = Option

	PBV20N2	PBV20PD	PBF25N2
GENERAL			
Micro-computer incl. hour meter and battery indicator with cut out (ATC T4)	-	●	-
Multifunctional display incl. BDI & hour meter	●	-	●
PIN code log in 100 codes	-	●	●
PIN code log in 4 codes	●	-	-
Foldable platform	●	●	-
Fixed platform, rear entry	-	-	●
Foldable sidebars	●	●	-
Short tiller arm with display and keypad	-	●	-
Multifunctional Steering wheel	-	-	●
Chill store design, down to 1°C, with rust protected axles	-	●	-
Speed regulated lift motor	●	●	●
Proportional valve for lowering, controlled by rocker switch on tiller head	-	●	-
Proportional valve for lift&lowering,controlled by fingertip levers on tiller head	●	-	-
Proportional valve for lift&lowering,controlled by fingertip levers on steering wheel	-	-	●
Polyurethan wheels	●	●	●
Initial lift	-	●	-
Tandem load wheels polyurethan	●	●	●
Single load wheel	●	●	-
Battery rollers	●	●	●
Li-ion batteries	-	●	-
ENVIRONMENT			
Cold store design, 0C° to -35C°	●	●	●
DRIVE AND LIFT CONTROLS			
Heavy duty tiller Head - with key switch entry	-	●	-
Tiller arm - Adjustable in lenght	-	●	-
Tiller up drive	●	●	-
WHEEL OPTIONS			
Polyurethan traction and load wheels	●	●	●
Power friction traction wheel	●	●	●
Non marking drive wheel	-	●	-
Anti static drive wheel	-	●	-
Palett entry / exit rollers	●	●	●
OTHER OPTIONS			
Driver protected platform rear entry	-	●	●
Driver protected platform side entry	-	●	-
Power steering	●	●	●
Warm environment fan	●	●	●
Overhead guard	-	●	-
Load backrest low or high	-	●	-
Load backrest, h=1300mm	●	-	●
Key switch entry	●	●	●
12V DC Power Socket	-	●	-
Equipment bar	●	●	●
Writing desk incl. RAM C holder	-	●	-
Equipment bar holder RAM system size C	-	●	-
Equipment bar holder RAM system size C, 2 pcs	-	●	-
Equipment bar holder RAM size D	-	●	-
Working light	●	-	●
Increased drive speed with/without load 10/12,5 km/h	●	●	●
Prepared for frequent battery change over, BCO	●	●	●
Special RAL colour	●	●	●

PREMIA EM

PBV20N2, PBV20PD & PBF25N2 Series

PLATFORM POWER PALLET AND DOUBLE PALLET TRUCKS

2.0 – 2.5 tonnes



PREMIA EM

OPTIONAL LI-ION BATTERY SYSTEMS FOR THE PBV20PD MODEL

MAKE YOUR FORKLIFT (AND ITS FUEL) GO EVEN FURTHER

Tried, tested and proven in the field, lead-acid batteries have been the long-standing top choice for companies employing electric lift trucks. However, with long charging times, demanding maintenance requirements, the need for extra batteries and high risk of operator misuse, it can be a challenge. Fortunately, there's a new battery system on the block: Li-ion from Mitsubishi Forklift Trucks.

Designed to meet your business' demands - including multi-shift (24/7) operations - without the need for spare batteries, our high-performance Li-ion battery system is up to 40 per cent more efficient than lead-acid counterparts. Plus, it's virtually error-proof, thanks to its ultra-low-maintenance design which prevent cell damage.

- **Exceptional, zero-emissions efficiency** 40% more efficient than lead-acid batteries and free from gases.
- **Ultra-low maintenance design** demands just a full charge each week to activate cell balancing, as well as an annual CSV export/update.

- **No space required** With no need for charging areas, there's no cost for set up and you can keep your profitable space just that: profitable..
- **Quick charge capabilities** mean that just 15 minutes is all your battery needs to keep your truck going a few more hours. (It only takes 1 to 2 hours to fully charge a completely discharged battery.)
- **Higher sustained voltage** ensures more consistent lifting and driving performance, which is particularly noticeable towards the end of a shift.
- **TriCOM Technology** delivers exceptionally high system efficiency (up to 97%).
- **Water-free design** With no water in the battery and no need to top up, there's no risk of operators damaging cells.
- **Active protection componentry** This continuously monitors the system, highlighting potential issues, including misuse.
- **Short circuit protection** is offered by system safeguards including: deep-discharge and overcharge protection, individual cell temperature and voltage monitoring.
- **On-the-go performance and monitoring** is possible thanks to the system's integrated monitoring system with easy-to-read display unit, as well as an opportunity charger on board.



PBV20PD with optional overhead guard

Battery capacity, Ah	208	260
Charger capacity, A, 1 – 2,5 hour*	100	200

* Both values possible for 208Ah Li Ion battery, depending on charger.

There is more information on Li-ion on mitforklift.com

For more extensive information please visit our website mitforklift.com



mft2.eu/lion

WHEN RELIABILITY IS EVERYTHING...



PREMIA THE NUMBER ONE

Number one for reliability... number one for productivity... whatever the conditions.

Compact, efficient and resilient, PREMIA powered pallet trucks meet every need.

Like any product bearing the "MITSUBISHI" name our materials handling equipment benefits from the tremendous heritage, huge resources and cutting-edge technology of one of the world's largest corporations – Mitsubishi Heavy Industries Group.

Engineering spacecraft, jet planes, power plants and more, MHI specialises in those technologies where performance, dependability and superiority decide your success or failure...

So when we promise you quality, reliability and value for money, you know it's a guarantee we have the power to deliver.

That's why every model in our award-winning and comprehensive range of lift trucks and warehouse equipment is built to a high specification – to ensure it keeps working for you. Day after day. Year after year. Whatever the job. Whatever the conditions.

YOU'LL NEVER WORK ALONE

As your local authorised dealer, we are here to keep your trucks working – through our extensive experience, our technical excellence and our commitment to customer care.

We are your local experts, backed by efficient channels to the entire organisation of Mitsubishi Forklift Trucks.

No matter where you are, we are close by – with the capability to meet your needs.

Discover how Mitsubishi Forklift Trucks give you more from your local authorised dealer or when you visit our website www.mitforklift.com

Performance specifications may vary depending on standard manufacturing tolerances, vehicle condition, types of tyres, floor or surface conditions, applications or operating environment. Trucks may be shown with non-standard options. Specific performance requirements and locally available configurations should be discussed with your distributor of Mitsubishi forklift trucks. We follow a policy of continual product improvement. For this reason, some materials, options and specifications could change without notice.

mitforklift@mcfe.nl

WESM1996 (10/19) © 2019 MCFE



Mitsubishi Caterpillar Forklift Europe B.V.
Hefbrugweg 77, 1332 AM Almere
The Netherlands
Tel: +31 (0)36 5494 411



mft2.eu/fb



mft2.eu/apps



mft2.eu/youtube



mft2.eu/facebook

